

# Swift Roller Mower

Rigid Deck, Three Point Linkage

The MAJOR Swift rigid deck roller mower delivers an exceptional quality of cut, even in the most challenging conditions. The 75mm blade overlap combined with high blade tip speeds results in a professional cylinder mower finish, every time. Reliability, durability and longevity are the signature qualities of the MAJOR Swift roller mower range.



Take a 360° virtual tour



The gearbox driveline eliminates the problems associated with belt-driven mowers and the use of 700 MC high-strength structural steel, which has been galvanised to EN ISO 1461:2009 standards, result in a premium deck mower that outlives most of its competitors and holds its value.

The Swift rigid deck roller mower is engineered to achieve a pristine finish across a wide variety of situations. For increased peace of mind, these mowers come with an industry-leading 3-year MAJOR warranty.



“




Ger's Story

The MAJOR Swift leaves a brilliant finish with the lovely stripes. The roller levels the divots so the playing surface is always smooth. The players and spectators have complimented on how it's looking. It is very easy to operate and maintain. It is a dream to work with."

**Ger O'Mahoney - Groundsman, Austin Stack Park**

FEATURES


- High performance custom-designed gearboxes
- Simple height adjustment from 10-130mm
- 75mm blade overlap for an impeccable finish
- Sealed internal roller bearings for total protection against moisture, soil and debris
- Full-length rollers follow the ground contours and eliminate scalping
- Optional scraper bar

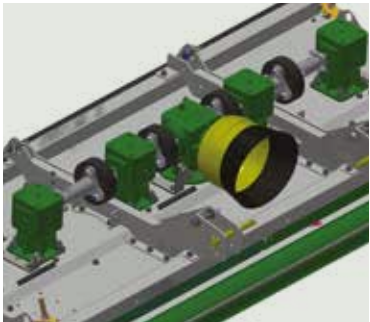

Heavy duty gearbox driven driveline



Two in one blade system, rigid and swinging

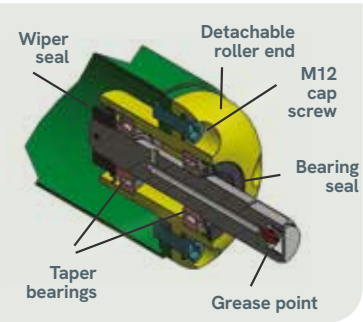

Internal roller bearings (on all MAJOR Swift and Synergy mowers)

| MODEL                           | MJ71-190      | MJ71-240      |
|---------------------------------|---------------|---------------|
| Overall Width                   | 2.00m (6' 6") | 2.50m (8' 2") |
| Working Width                   | 1.90m (6' 3") | 2.40m (8')    |
| Transport Width                 | 2.00m (6' 6") | 2.50m (8' 2") |
| Power (HP)                      | 25-70 HP      | 30-80 HP      |
| PTO rpm                         | 540           | 540           |
| Cutting Height                  | 10-130mm      | 10-130mm      |
| Rotors                          | 3             | 4             |
| Blades                          | 6             | 8             |
| Weight                          | 475kg         | 560kg         |
| Blade tip speed                 | 75 m/s        | 75 m/s        |
| Mowing Rates (Acres/hr at 7mph) | 5.3           | 6.7           |

